


ARGUS

Optical Turnstile with Swinging Barriers

With a focus on European design and engineering, the architecturally inspired features and materials of the ARGUS make it a centerpiece for premium lobbies worldwide.

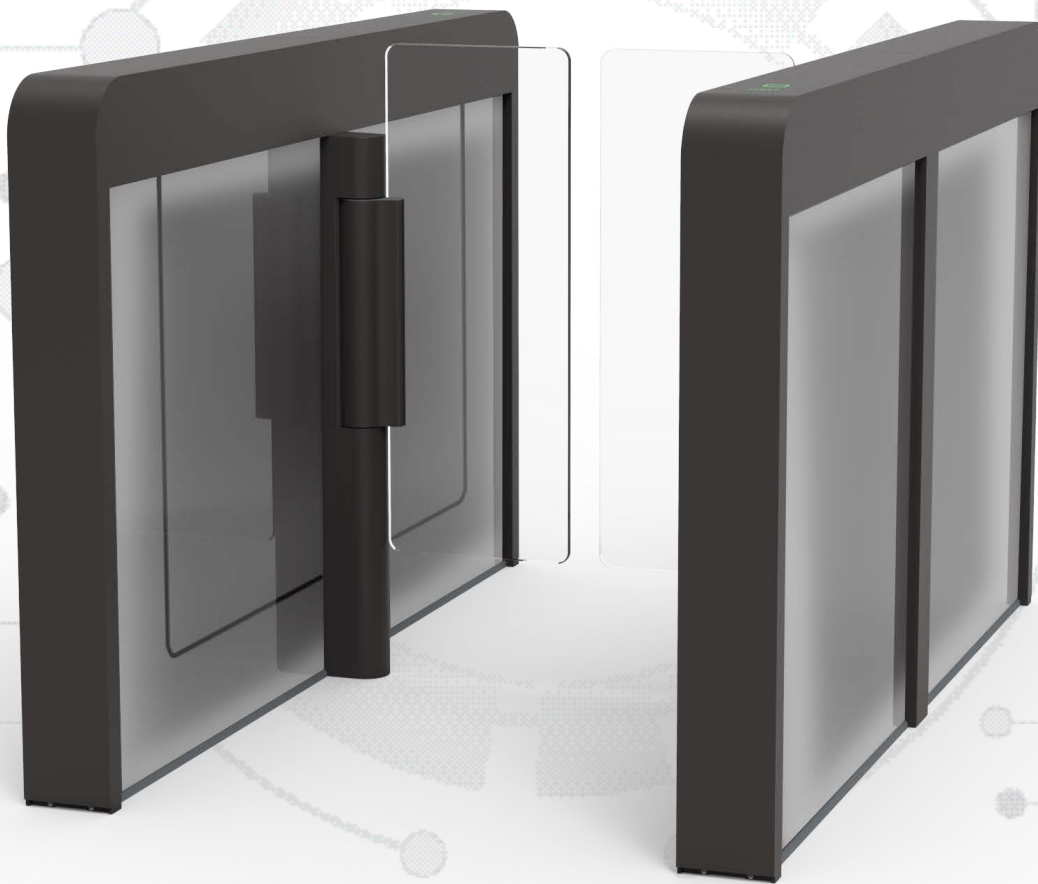

Product Features and Benefits

- Superior tailgate detection
- Automates employee and guest entry
- Fast user throughput
- ADA passage widths
- Accepts all types of credential & biometric readers
- Integrates to access control/life safety systems
- LED illuminated user lights embedded in cabinet
- Dozens of cabinet finish and lid color options
- Download configuration changes & custom sounds over Bluetooth

OPTICAL TURNSTILES

www.alvaradomfg.com



Available Models

Standard Model	ARGUS 80
Additional Models	ARGUS 40, ARGUS 60

Common Applications

- Employee and visitor access control
- Pedestrian traffic flow control
- Time and attendance integration

Typical Installation Sites

- Government facilities
- Corporate lobbies
- Campus recreation centers
- Health clubs

Options

Over a dozen available options, including:

- Panel illumination and custom etching
- Multiple glass or polycarbonate barrier sizes
- Custom lid colors and cabinet finishes
- Card and biometric access reader integration
- Barcode reader visitor system integration
- Elevator destination dispatch integration
- Floor-saver platform

Safe and User Friendly Operation

- Illuminated user displays guide and instruct patrons
- Individual customizable sounds (.wav files) provide notification of card status and alarm conditions (i.e. an unauthorized passage attempt)
- Closed loop motor control and strategically placed safety sensors provide a high level of user safety

Electrical

Power Supply	100-240VAC, 50/60 Hz
Peak Consumption	300W
Operational Voltage	VDC, 24/12/5

Field Adjustable Settings

Core turnstile settings are adjusted in the field using a Bluetooth connection. Using a PC, tablet or smartphone, configurable features – such as audio sounds, motor settings, detection settings, tailgate settings and alarm timer settings – are changed by connecting directly to the ARGUS.

Access Control and Fire System Integration

The ARGUS integrates easily to access control and fire systems through I/O (dry contact).

Operating Modes

Card in/card out; card in/free exit; free entry/free exit; exit only.

Dimensions

Dimensions shown in inches (mm).

