

Tournex



**BOON EDAM**


Available in large diameters with spacious segments, the Tournex is an ideal entry solution for applications with large traffic flow. This automatic revolving door is available with three or four door wings and can optionally be equipped with a showcase around the center column with rounded or flat glass. This showcase can be used as advertising space or to reinforce the feel of the building.

 *your entry experts*



Dimensions and Specifications

| A Diameter | Capacity / Minute | # of Door Wings | Disabled Access | B Instal- lation Width | C Throat Opening | D Height Under Canopy | E Canopy Height |
|---------------|----------------------|--------------------|--------------------|---------------------------------|------------------------|--------------------------------|-----------------------|
| 12' 0" | 2x 35-40 | 3 | ♿ | 12' 3-1/4" | 5' 5-1/8" | 7' 0" | 11-13/16" |
| 12' 0" | 2x 30-35 | 4 | ♿ | 12' 3-1/4" | 7' 11-13/16" | 7' 0" | 11-13/16" |
| 14' 0" | 2x 50-55 | 3 | ♿ | 14' 2-7/8" | 6' 4-15/16" | 7' 0" | 11-13/16" |
| 14' 0" | 2x 40-45 | 4 | ♿ | 14' 2-7/8" | 9' 4-1/2" | 7' 0" | 11-13/16" |
| 16' 0" | 2x 55-60 | 3 | ♿ | 16' 2-1/2" | 7' 4-3/4" | 7' 0" | 11-13/16" |
| 16' 0" | 2x 60-65 | 4 | ♿ | 16' 2-1/2" | 10' 9-1/4" | 7' 0" | 11-13/16" |
| 18' 0" | 2x 65-70 | 3 | ♿ | 18' 2-1/8" | 8' 4-9/16" | 7' 0" | 11-13/16" |
| 18' 0" | 2x 65-70 | 4 | ♿ | 18' 2-1/8" | 12' 2" | 7' 0" | 11-13/16" |
| 20' 0" | 2x 70-75 | 3 | ♿ | 20' 1-3/4" | 9' 4-3/8" | 7' 0" | 11-13/16" |
| 20' 0" | 2x 75-80 | 4 | ♿ | 20' 1-3/4" | 13' 6-5/8" | 7' 0" | 11-13/16" |

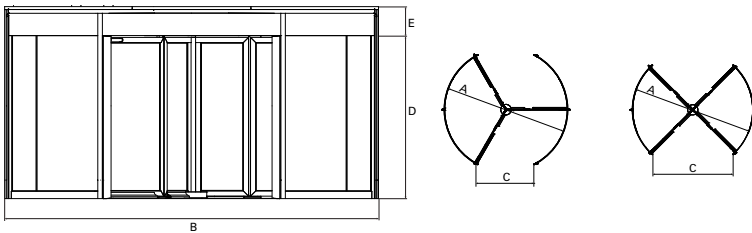

Emergency Egress

In case of a power failure or fire alarm the door set will unlock automatically and the door wings can be collapsed together to create an open passage way. Alternatively the Tournex can be unlocked by pushing the emergency open button in the door. (Escape route requirements are subject to local regulations.)

Features and Options

| Characteristics | Standard | Option |
|--|----------|--------|
| LED ceiling lights | • | |
| "Push to slow" button | • | |
| Emergency stop button | • | |
| Dust cover | • | |
| Concave showcase | • | |
| Two-point recessed locks | | • |
| Flat showcase | | • |
| Star design (no showcase) | | • |
| Floor frame / matwell ring | | • |
| Extended canopy heights | | • |
| After-hours card reader activation | | • |
| Night locking doors | | • |
| Dust cover to match door finish | | • |
| Prepared for roofing membrane supplied by others | | • |
| Variety of finishes | | • |

Technical Specifications

| | |
|--------------------------|-----------------------|
| Power Supply: | 200-240 VAC, 50/60 Hz |
| Motor: | AC motor, 3-phase |
| Power Consumption | |
| Operating: | 400W |
| Stationary: | 40W |
| Ambient Temperature: | -4°F to +122°F |