



Super Shallow Foundation Bollards Model: SS-800

GS-07F-0341V

GSA

- ♦ ASTM M40, P1 - Single, bollard stopped a 15,000 lbs. vehicle at 40 MPH impact (bi-directional stopping capability)
- ♦ Ideal for Parking decks, basements, subways, or tunnels. Requires only 4" Excavation.
- ♦ No tying, bolting, welding, assembly or specialty subgrade required (allows for field adjustment)
- ♦ Removable bollard available
- ♦ Variety of covers available including decorative or lighted
- ♦ Easy to install with turns and across grade elevation changes



Barrier1 Systems
Greensboro, NC
(336) 617-8478

SCAN ME
TO LEARN MORE

ASTM F2656-15
Tested

M40 (K8)
P1 Rated


STOPS 15,000 LBS.
VEHICLE AT 40 MPH

PRODUCT DETAILS

Bollard: 10 3/4" OD Steel Pipe

Weight: 1,600 lbs. Each (with rebar)

Ideal for parking decks, etc.
Easily avoid underground
utilities with only 4" excavation.

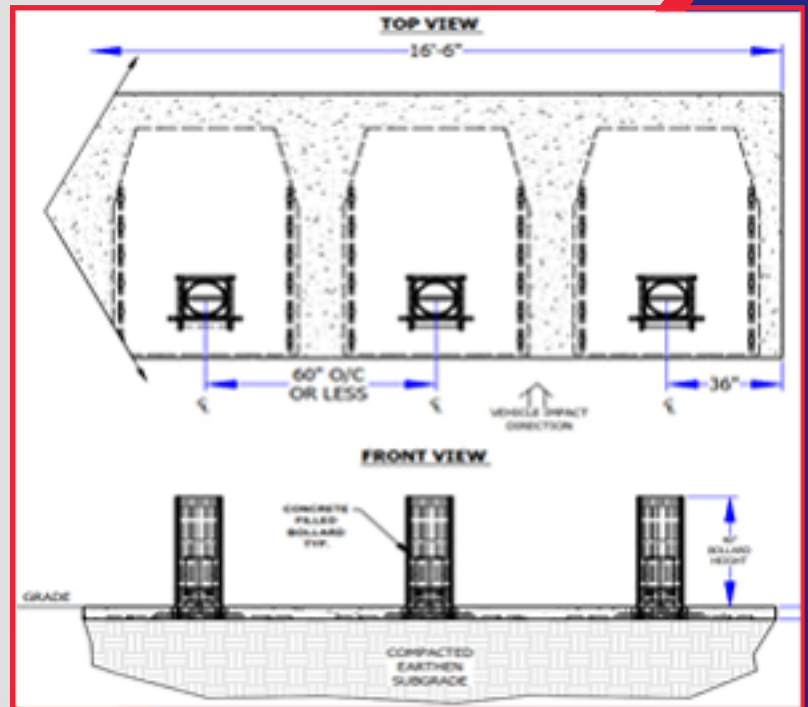

BARRIER1™