

DCM-25

High Security Vertical Pivot Gates

Durable, Secure Commercial Entryways



DCM-25 115 volt AC with DC battery backup

Tilt-A-Way vertical pivot gates are designed to meet the security and aesthetic objectives for all commercial security requirements. Engineered to withstand severe weather and high winds, Tilt-A-Way represents the unparalleled security expertise and commitment to quality required by discriminating installations such as airports, military, FAA, municipalities, nuclear plants, courthouses, gated communities, mini storages, and residential properties.

TILT·A·WAY
TILT·A·WAY
TILT·A·WAY®




IDEAL
MFG., INC.

Dedicated Performance

It Costs Less To Buy The Best! IDEAL's custom design services and "satisfaction guaranteed" policy ensure that each Tilt-A-Way Vertical Pivot Gate provides years of effortless, low maintenance operation with no belts that slip and need continuous adjustments.

Operator

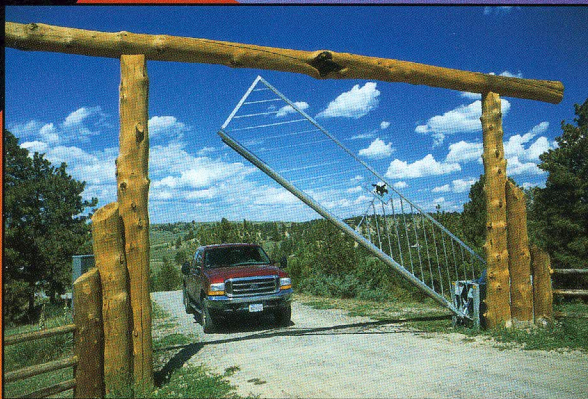

2" x 2" x .120 welded steel tubing (Pedestal frame)

2" x 4" x .120 steel tubing (Front frame support)

Covered with 063 aluminum cross-broke panels

Powered by 115 volt AC with DC battery backup

Powered by a 1/4 horsepower right angle DC gear motor drive which powers the chain drive gate actuator with cushioned stops

Limit switches on both ends of travel

Opens in 8 to 10 seconds • Closes in 8 to 10 seconds

Anti-twist bottom support member

Aluminum 3.5" schedule 40 round tubing

Steel 3.5" schedule 20 round tubing

Barrier

Lengths up to 25 feet and maximum of 8 foot height

Custom designs available

Safety Features

Adjustable safety obstruction system

Barrier locks in down position



IDEAL
MFG., INC.

2011 Harnish Blvd.
Billings, Montana 59101

www.tiltaway.com

Telephone: (800) 523-3888
or (406) 656-4360

Fax: (406) 656-4363
email: info@idealmfginc.com